

LUMANTIX-Z




Design Licenced By
TRILUX

Decorative post-top luminaire with cylindrical form.

Its MLT version (Multi-Lens Technology), consisting of highly efficient UV and temperature-resistant lens systems in 4-fold configuration with symmetric wide light intensity distribution for illuminating paths, especially cycle paths. Further beam characteristics are available for flexible adaptation to customer - specific lighting tasks.

Luminaire body of cast aluminium. Diffuser of highly impact - resistant clear PMMA.

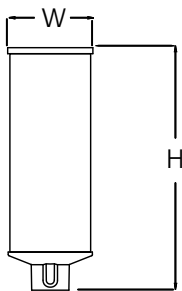

Input Power	Size		Weight	Rated Voltage	Power Factor	ATHD	Input Frequency	Efficacy*	CCT**	CRI
	W (mm)	H	(Kg)	(V)				(Lm/W)		
LUMANTIX - Z 25W	210	600	6.5	240	>0.95	<10%	50Hz	100	WW/NW/CW	70
LUMANTIX - Z 35W	210	600	6.5	240	>0.95	<10%	50Hz	100	WW/NW/CW	70

* For NW/CW only. Option available in 110Lm/W


** WW: 3000K, NW: 4000K, CW: 5700K. Other CCTs also available on request

Material & Finish

- Housing - Pressure Die Cast Aluminium
- Protector - Clear PMMA
- Finish - Powder coated Grey

Installation & Mounting 3 - 6m

- Mounting on 76mm OD diameter pipe

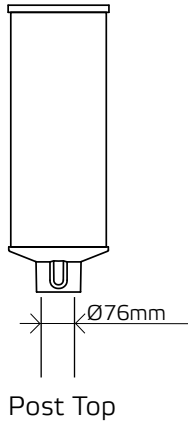

IS 10322
(Part 5/Sec 3):2012

R-91003158
www.bis.gov.in

IP65


IK07

10KV




>50,000
Hours
L70


Light Distribution

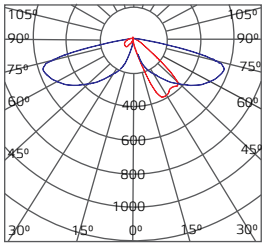


Asymmetric

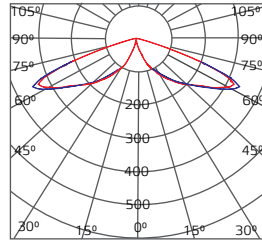


Rotationally Symmetric

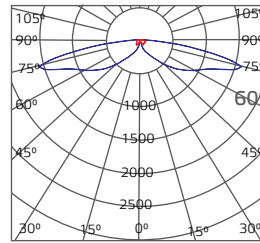

Symmetric

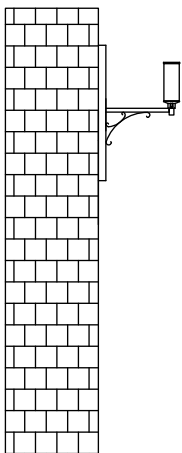


Wall bracket

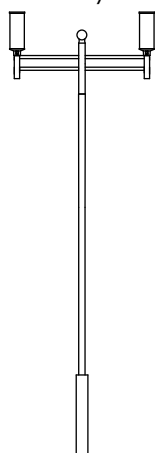


Eco pole with post top bracket



Eco pole

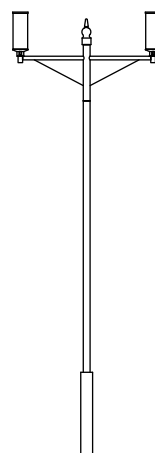

Eco pole with Strut bracket



Bali pole with scroll bracket

Manufacturing:

Kesslec Smart Lighting Technologies Private Limited
(Formerly Kesselec Lighting Private Limited 
Plot no 55 Industrial Area | N.I.T
Faridabad - 121001 | Haryana | India
E-mail: info@kesslec.com

