


BELIZE

ORCHESTRA OF
POSSIBILITIES



The luminaire is made up of a translucent low density polyethylene (LDPE) body (glowing from inside) and a toughened glass protector (IK08) with an overall tightness of IP66.

The luminaire is available in yellow or green or white colours.



Input Power	Size W H (mm)		Weight (Kg)	Rated Voltage (V)	Power Factor	ATHD	Input Frequency	Efficacy* (Lm/W)	CCT**	CRI****
BELIZE 35W	510	460	6.5	240	>0.95	<10%	50Hz	70	NW/CW/WW	70
BELIZE 60W	510	460	6.5	240	>0.95	<10%	50Hz	70	NW/CW/WW	70

*For NW/CW only.

**WW: 3000K, NW: 4000K, CW: 5700K. Other CCTs also available on request



Material & Finish

- Housing - (Low density polyethylene) LDPE
- Protector - Toughened glass
- Colour - Yellow translucent body
(Optional: Green or White)

IS 10322
(Part 5/Sec 3):2012

R-91003158
www.bis.gov.in

IP66

IK08

10KV










>50,000
Hours
L70

Installation & Mounting

- Mounting on a spigot of 42mm.

Light Distribution

Narrow beam or wide beam or asymmetric light.

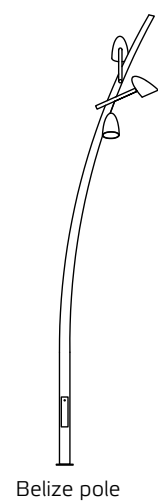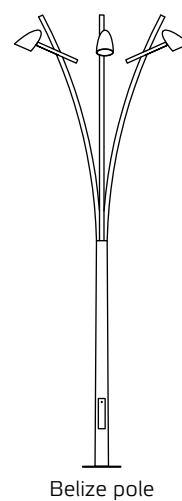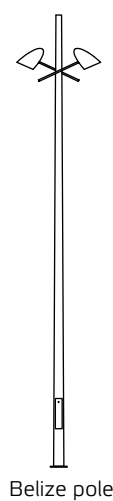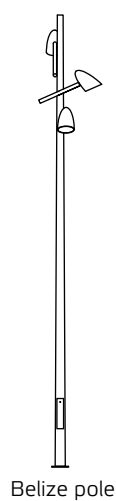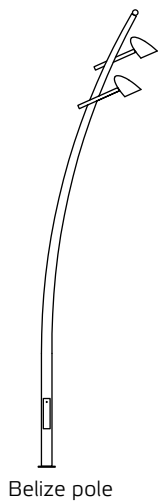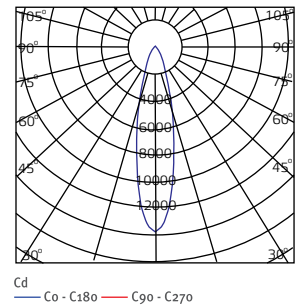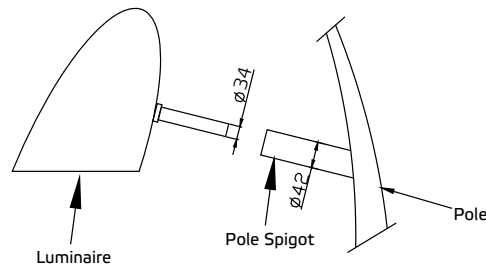

Manufacturing:
Kesslec Smart Lighting Technologies Private Limited
 (Formerly Keselec Lighting Private Limited )
 Plot no 55 Industrial Area | N.I.T
 Faridabad -121001 | Haryana | India
 E-mail: info@kesslec.com



The information, description and illustrations are only of an indicative nature and due to continuous R&D on our products we reserve the rights to alter the characteristics without notice. As specific projects may have different characteristics, we invite you to consult us.