


# CAMBRIDGE

## ELEGANT ROMAN DESIGN



The Cambridge luminaire combines a classic design with advanced LED technology that ranges from 25W to 35W. Ideal for installation in outdoor or indoor spaces at bridges, parks, residential areas, jogging tracks, town centers, historic neighborhoods, and community shopping centers.

We offer Cambridge both symmetrical and asymmetric optics for a variety of lighting applications.

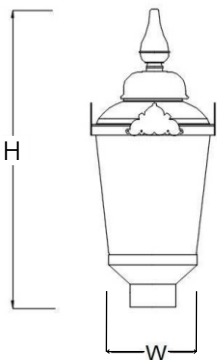

Input Power	Size W H (mm)	Weight (Kg)	Rated Voltage (V)	Power Factor	ATHD	Input Frequency	Efficacy* (Lm/W)	CCT**	CRI
CAMBRIDGE 25W	270 650	7.0	240	>0.95	<10%	50Hz	110	WW/NW/CW	70
CAMBRIDGE 30W	270 650	7.0	240	>0.95	<10%	50Hz	110	WW/NW/CW	70
CAMBRIDGE 35W	270 650	7.2	240	>0.95	<10%	50Hz	110	WW/NW/CW	70

\* For NW/CW only.



\*\* WW: 3000K, NW: 4000K, CW: 5700K. Other CCTs also available on request



### Material & Finish

- Housing - Die cast & spun aluminium
- Protector - PC Protector
- Finish - Powder coated black


IS 10322  
(Part 5/Sec 3):2012  
  
 R-91003158  
 www.bis.gov.in

IP66*	IK08	10KV			>50,000 Hours L70
-------	------	------	--	--	-------------------


\* For Optical compartment

### Installation & Mounting 3 - 8m

- Mounting on spigot of 76mm dia for post top bracket




### Light Distribution



Blenheim pole



Richmond pole

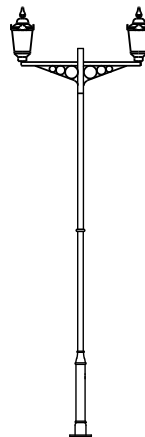

Blenheim pole with double side hoop bracket



Bali pole

Manufacturing:  
**Kesslec Smart Lighting Technologies Private Limited**  
 (Formerly Keselec Lighting Private Limited )  
 Plot no 55 Industrial Area | N.I.T  
 Faridabad - 121001 | Haryana | India  
 E-mail: info@kesslec.com