

# NICE

STYLISH  
&  
CONTEMPORARY



NICE comes in two distinct shaped models NICE-R & NICE-O that offer comfort lighting through uniform light distribution. NICE (35W & 60W) is suitable for residential & corporate campuses, service roads, car parks, and driveways.

NICE boasts of zero light pollution by ensuring 0% Upwards light output ratio (ULOR).


NICE is a high performance luminaire with option for photocell for cost effective energy saving requirements in urban areas.



Integrated Lenses



Photocell

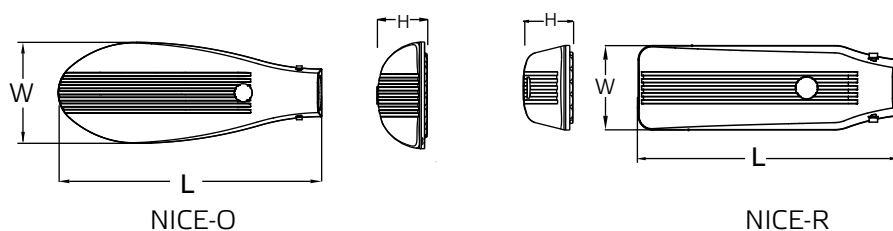

Input Power	L	Size W (mm)	H	Weight (Kg)	Rated Voltage (V)	Power Factor	ATHD	Input Frequency	Efficacy* (Lm/W)	CCT**	CRI
NICE-R 35W	370	120	70	1.9	240	>0.95	<10%	50Hz	110	WW/NW/CW	70
NICE-O 60W	470	180	85	2.7	240	>0.95	<10%	50Hz	110	WW/NW/CW	70


\* For NW/CW only.

\*\* WW: 3000K, NW: 4000K, CW: 5700K. Other CCTs also available on request



## Material & Finish

- Housing - Pressure Die Cast Aluminium
- Protector - Polycarbonate with integrated lenses
- Finish - Powder Coated



IS 10322  
(Part 5/Sec 3):2012  
R-91003158  
www.bis.gov.in

IP66

IK08


4KV




>50,000  
Hours  
L70

## Installation & Mounting 3 - 8m


- Spigot of 60mm dia for NICE-O and 48mm for NICE-R
- Spigot for lateral and post top installation




## Light Distribution



NICE-R



NICE-O

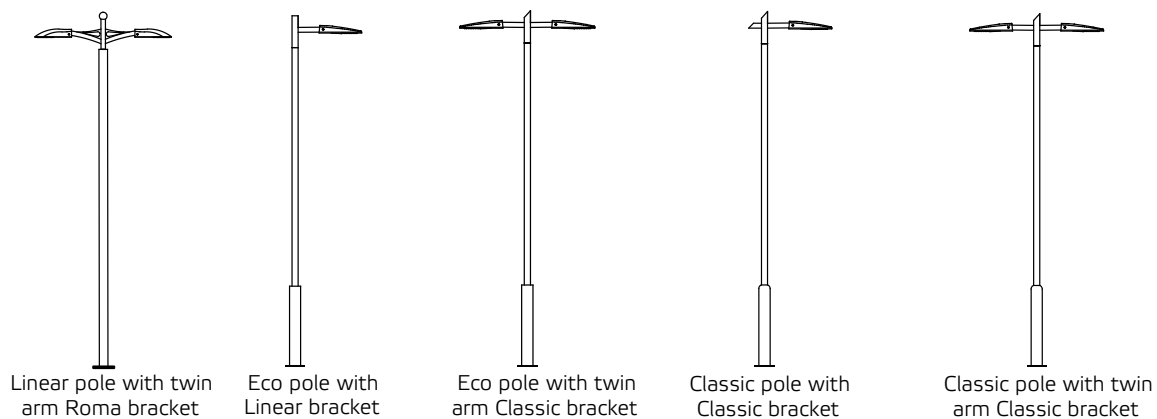

Manufacturing:  
Kesslec Smart Lighting Technologies Private Limited  
(Formerly Keselec Lighting Private Limited **Kesslec**)  
Plot no 55 Industrial Area | N.I.T  
Faridabad -121001 | Haryana | India  
E-mail: info@kesslec.com



The information, description and illustrations are only of an indicative nature and due to continuous R&D on our products we reserve the rights to alter the characteristics without notice. As specific projects may have different characteristics, we invite you to consult us.