

WELS

SUN FOR THE NIGHT




Decorative post top luminaire with a symmetric 360° circular LED light distribution. An ideal luminaire for making inner - city parks and public areas into well lit, safe and secure environment

Luminaire body of cast aluminium and a prismatic polycarbonate diffuser of high impact resistance.



Easy to Install

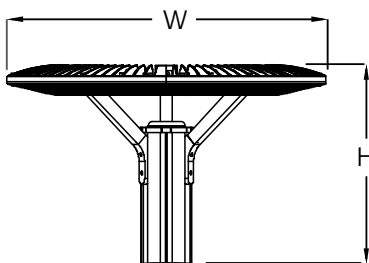

Uniform Illumination

Input Power	Size		Weight	Rated Voltage	Power Factor	ATHD	Input Frequency	Efficacy*	CCT**	CRI
	W (mm)	H (mm)	(Kg)	(V)				(Lm/W)		
WELS 30W	600	430	6.2	240	>0.95	<10%	50Hz	100	WW/NW/CW	70
WELS 40W	600	430	6.2	240	>0.95	<10%	50Hz	100	WW/NW/CW	70
WELS 50W	600	430	6.4	240	>0.95	<10%	50Hz	100	WW/NW/CW	70
WELS 60W	600	430	6.5	240	>0.95	<10%	50Hz	100	WW/NW/CW	70

* For NW/CW only.

** WW: 3000K, NW: 4000K, CW: 5700K. Other CCTs also available on request



Material & Finish

- Housing - Pressure Die Cast Aluminium
- Protector - Polycarbonate
- Finish - Powder Coated Grey

Installation & Mounting 3 - 6m

- Mounting on 76mm OD diameter pipe

IS 10322
(Part 5/Sec 3):2012

R-91003158
www.bis.gov.in

IP66*


IK08

4KV





>50,000
Hours
L70


* Optical compartment




Light Distribution

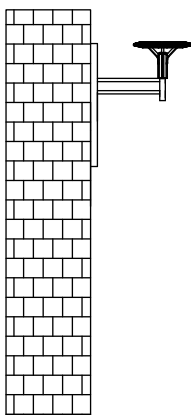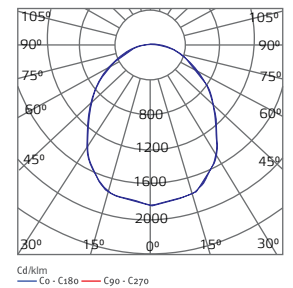


Wall bracket




Costworth pole

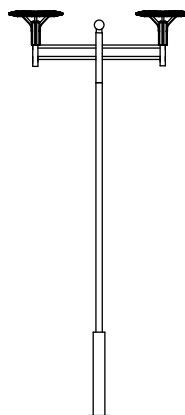

Eco pole with
post top
bracket



Classic pole



Bali pole
with scroll
bracket

Manufacturing:
Kesslec Smart Lighting Technologies Private Limited
(Formerly Keselec Lighting Private Limited )
Plot no 55 Industrial Area | N.I.T
Faridabad - 121001 | Haryana | India
E-mail: info@kesslec.com



The information, description and illustrations are only of an indicative nature and due to continuous R&D on our products we reserve the rights to alter the characteristics without notice. As specific projects may have different characteristics, we invite you to consult us.